










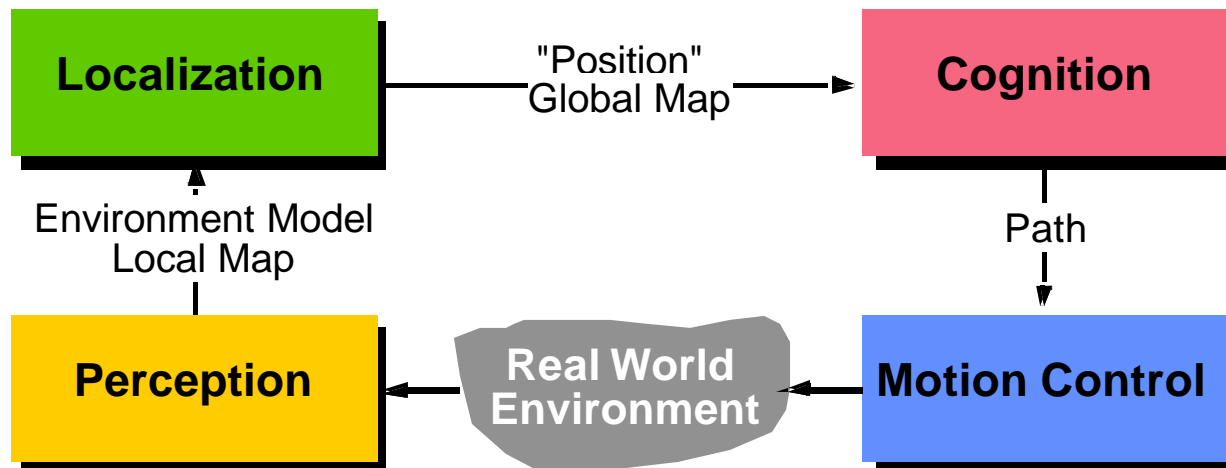



# Locomotion Concepts

- Concepts
- Legged Locomotion
- Wheeled Locomotion



# Locomotion Concepts: Principles Found in Nature


Type of motion	Resistance to motion	Basic kinematics of motion
Flow in a Channel 	Hydrodynamic forces	Eddies 
Crawl 	Friction forces	Longitudinal vibration 
Sliding 	Friction forces	Transverse vibration 
Running 	Loss of kinetic energy	Oscillatory movement of a multi-link pendulum 
Jumping 	Loss of kinetic energy	Oscillatory movement of a multi-link pendulum 
Walking 	Gravitational forces	Rolling of a polygon (see figure 2.2) 

# Locomotion Concepts


---

- Concepts found in nature
  - *difficult to imitate technically*
- Most technical systems use wheels or caterpillars
- Rolling is most efficient, but not found in nature
  - *Nature never invented the wheel !*
- However, the movement of a walking biped is close to rolling

## Walking of a Biped

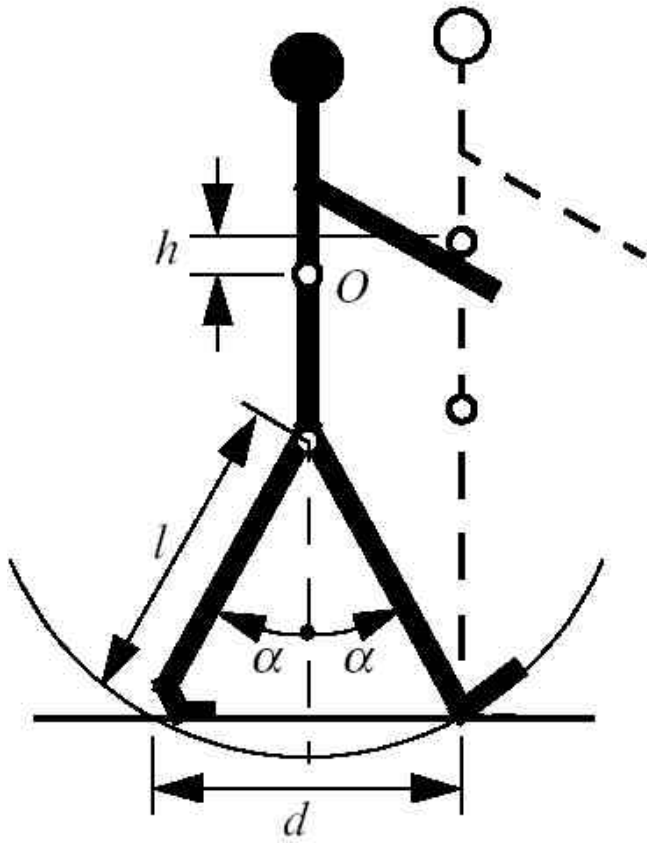


- Biped walking mechanism
  - *not to fare from real rolling.*
  - *rolling of a polygon with side length equal to the length of the step.*
  - *the smaller the step gets, the more the polygon tends to a circle (wheel).*
- However, fully rotating joint was not developed in nature.




## Walking or rolling?

- number of actuators
- structural complexity
- control expense
- energy efficient
  - *terrain (flat ground, soft ground, climbing..)*
- movement of the involved masses
  - *walking / running includes up and down movement of COG*
  - *some extra losses*

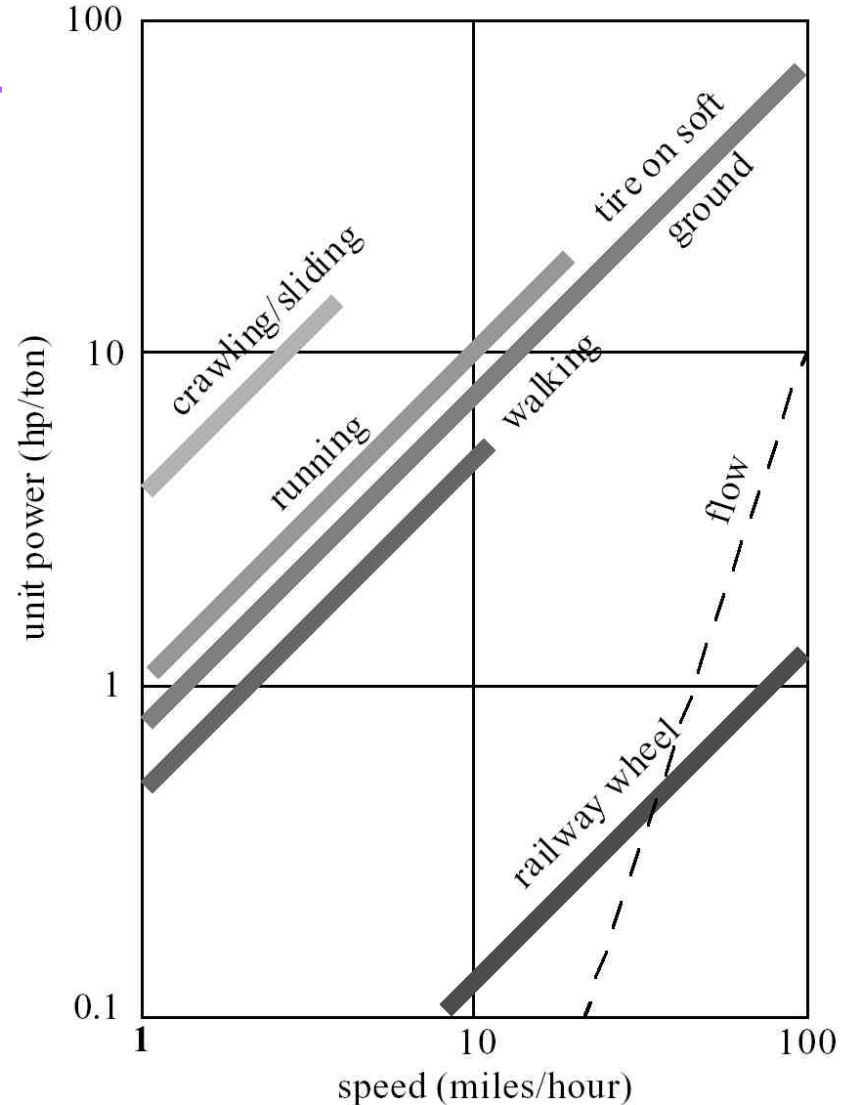

## RoboTrac, a hybrid wheel-leg vehicle

---

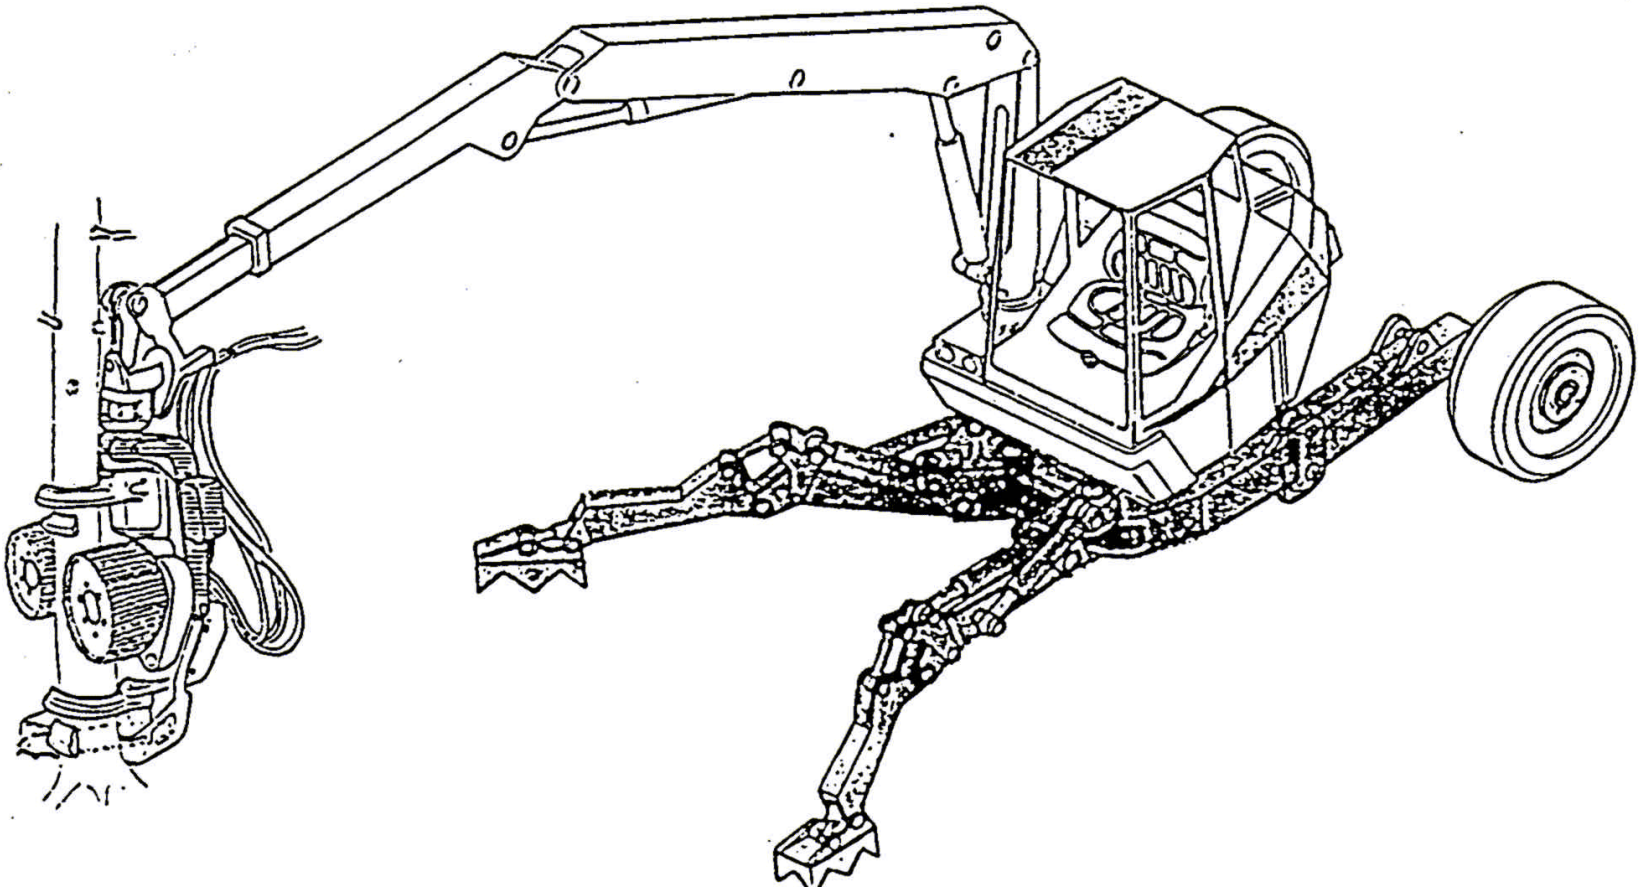


# Characterization of locomotion concept

---

- Locomotion
  - *physical interaction between the vehicle and its environment.*
- Locomotion is concerned with *interaction forces*, and the *mechanisms* and *actuators* that generate them.
- The most important issues in locomotion are:
  - **stability**
    - *number of contact points*
    - *center of gravity*
    - *static/dynamic stabilization*
    - *inclination of terrain*
  - **characteristics of contact**
    - *contact point or contact area*
    - *angle of contact*
    - *friction*
  - **type of environment**
    - *structure*
    - *medium (water, air, soft or hard ground)*

## Mobile Robots with legs (walking machines)

- The fewer legs the more complicated becomes locomotion
  - *stability, at least three legs are required for static stability*
- During walking some legs are lifted
  - *thus losing stability?*
- For static walking at least 6 legs are required
  - *babies have to learn for quite a while until they are able to stand or even walk on there two legs.*


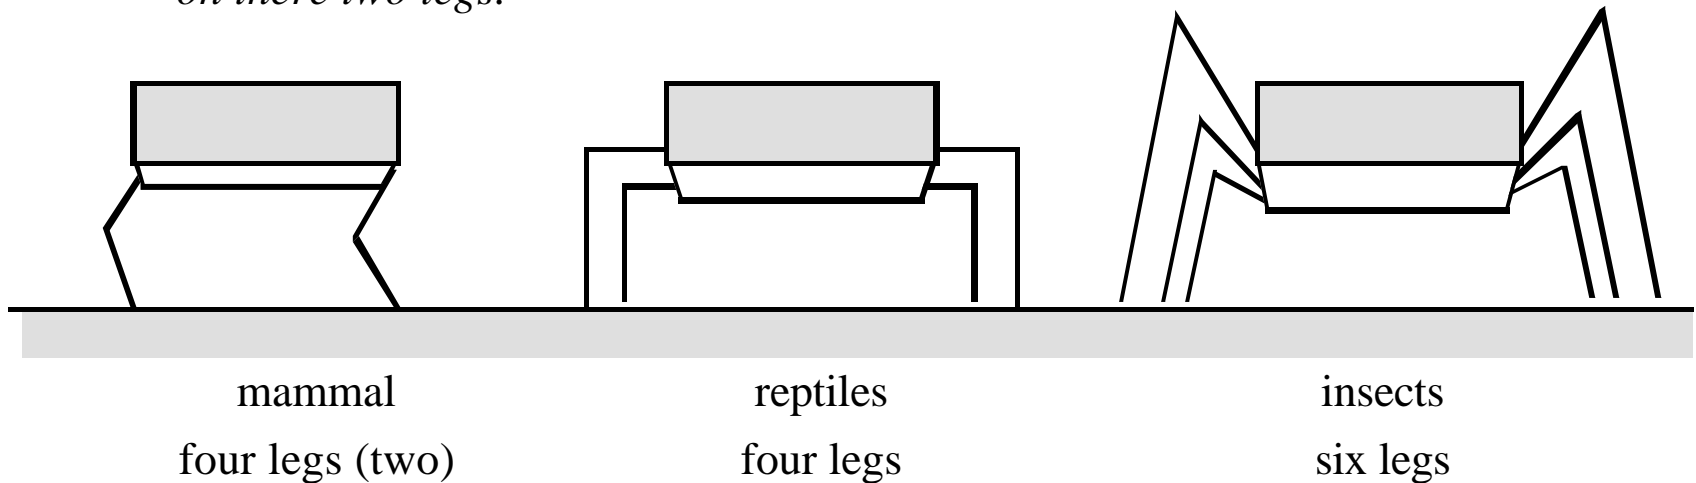


## Number of Joints of Each Leg (DOF: degrees of freedom)

---

- A minimum of two DOF is required to move a leg forward
  - a **lift** and a **swing** motion.
  - *sliding free motion in more than only one direction not possible*
- Three DOF for each leg in most cases
- Fourth DOF for the ankle joint
  - *might improve walking*
  - *however, additional joint (DOF) increase the complexity of the design and especially of the locomotion control.*

# Examples of Legs with 3 DOF

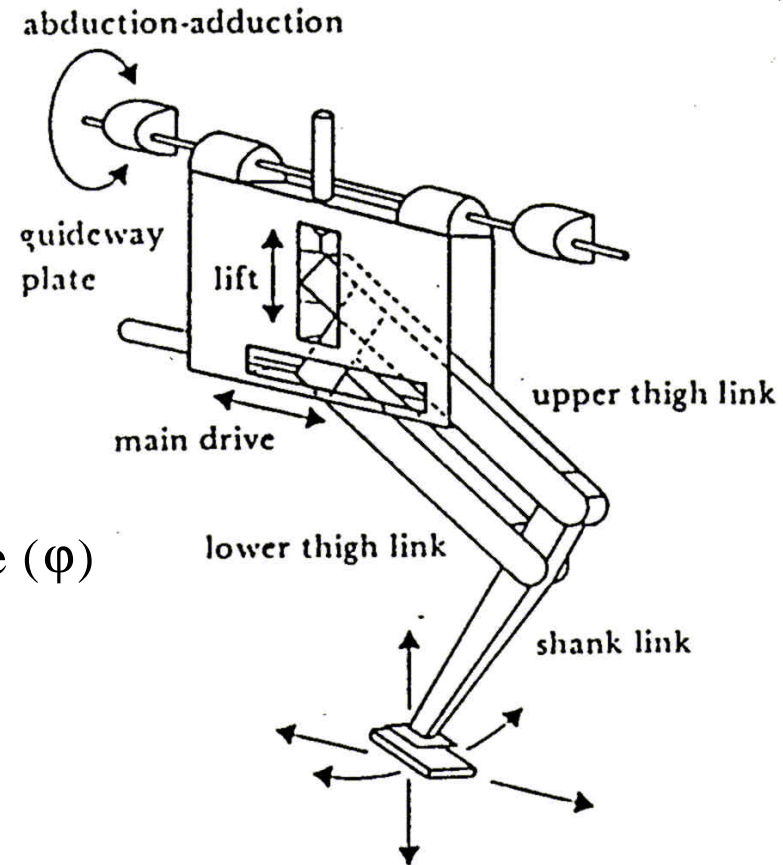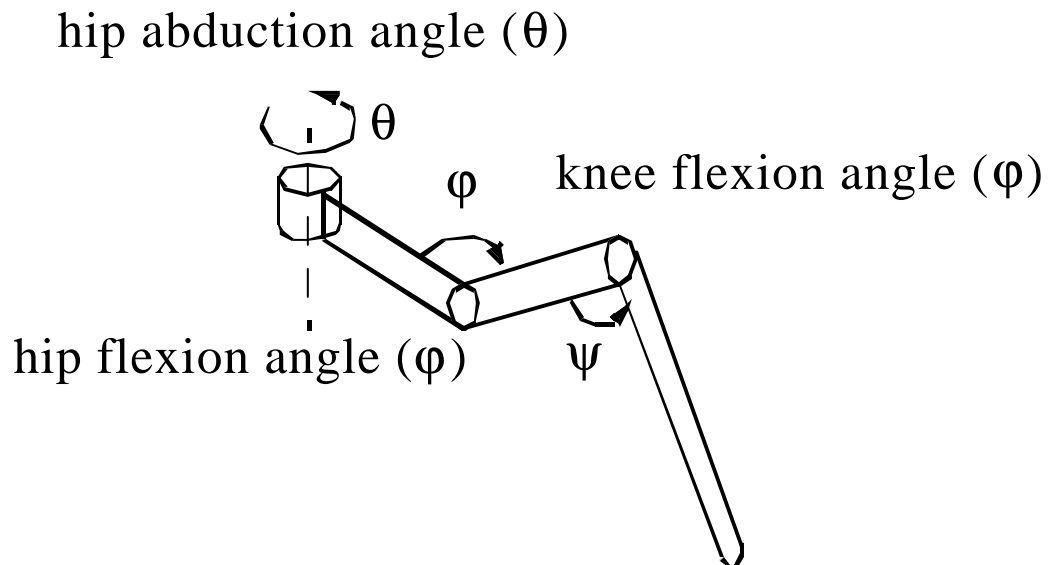

## The number of possible gaits

---

- The gait is characterized as the sequence of lift and release events of the individual legs

- *it depends on the number of legs.*

- *the number of possible events  $N$  for a walking machine with  $k$  legs is:*

$$N = (2k - 1)!$$

- For a biped walker ( $k=2$ ) the number of possible events  $N$  is:

$$N = (2k - 1)! = 3! = 3 \cdot 2 \cdot 1 = 6$$


- *The 6 different events are:*

- lift right leg / lift left leg / release right leg / release left leg / lift both legs together / release both legs together*

- For a robot with 6 legs (hexapod)  $N$  is already

$$N = 11! = 39'916'800$$





# Most Obvious Gaits with 4 legs

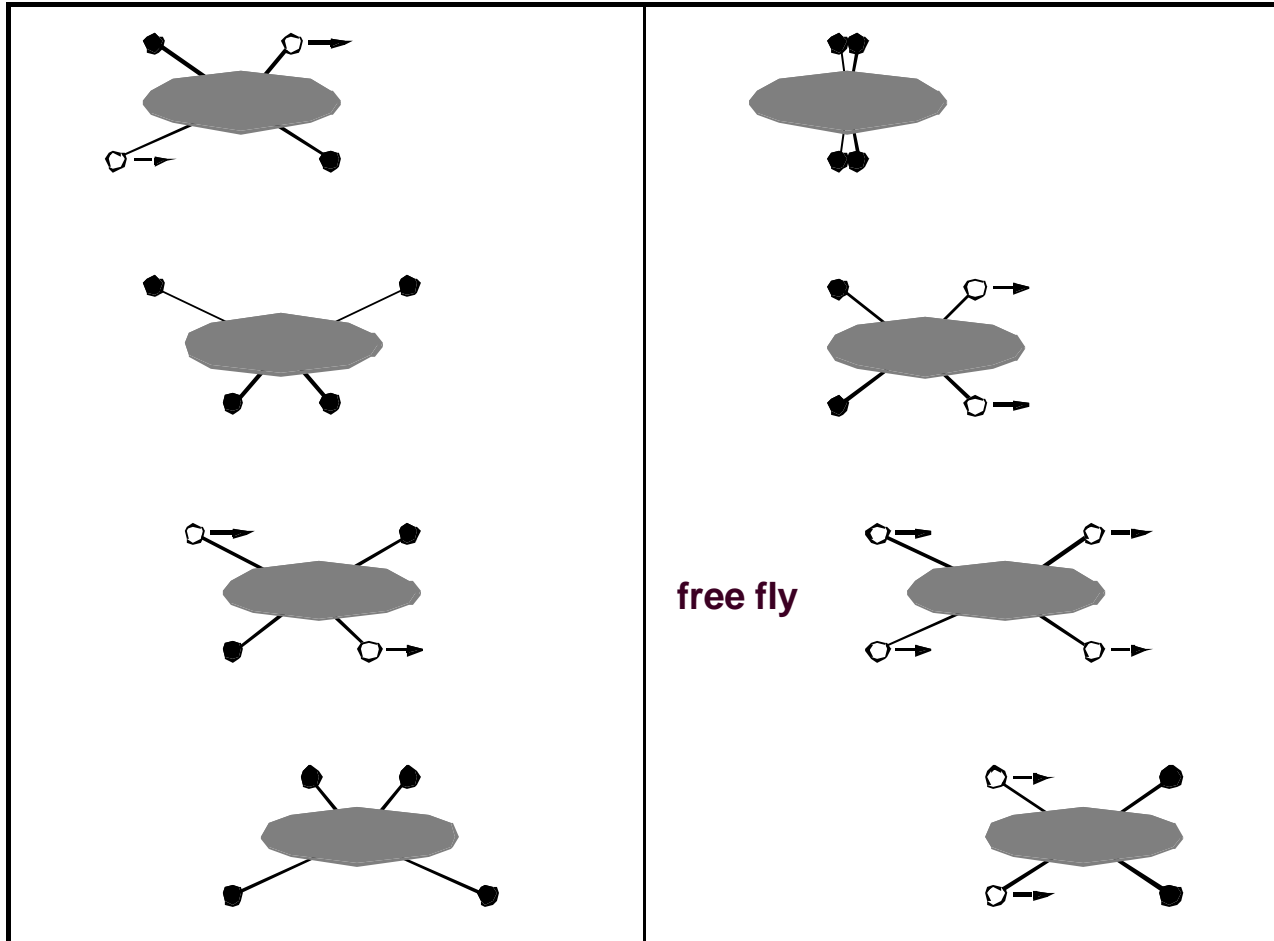

Changeover Walking

Galloping

# Most Obvious Gait with 6 legs (static)

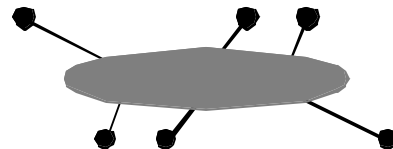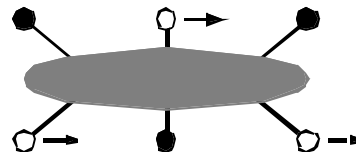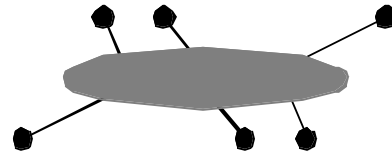
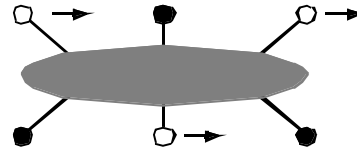


## Examples of Walking Machines

- No industrial applications up to date, but a popular research field
- For an excellent overview please see:  
<http://www.uwe.ac.uk/clawar/>









*The Hopping Machine*

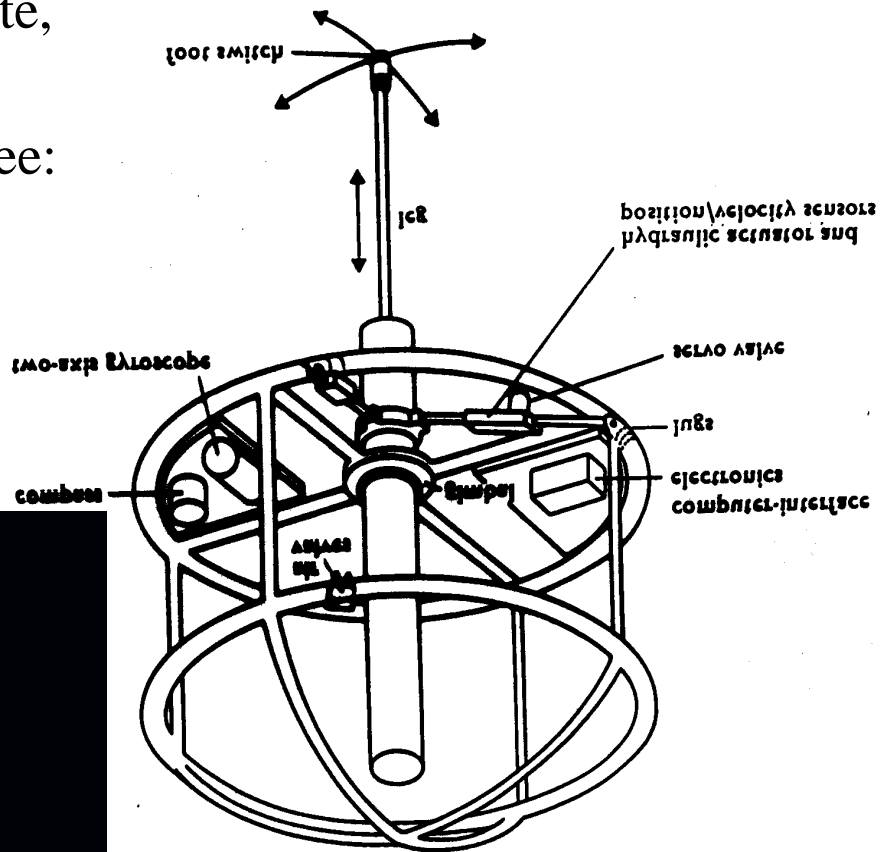

# Humanoid Robots

- P2 from Honda, Japan


- *Maximum Speed: 2 km/h*
- *Autonomy: 15 min*
- *Weight: 210 kg*
- *Height: 1.82 m*
- *Leg DOF: 2\*6*
- *Arm DOF: 2\*7*

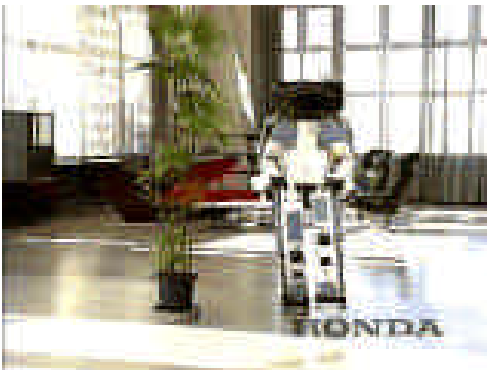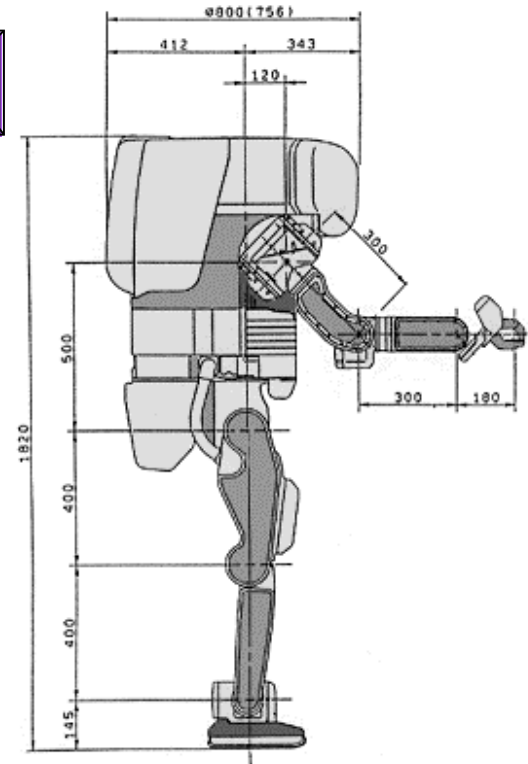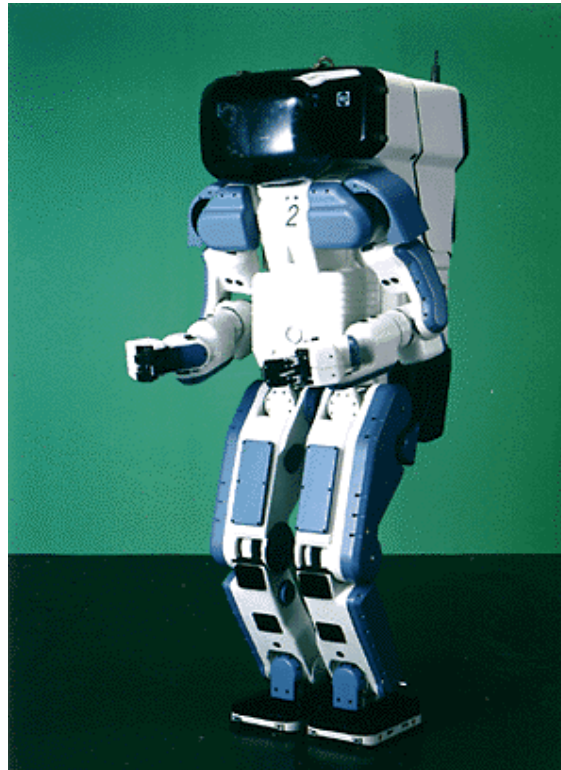

## Bipedal Robots

---

- Leg Laboratory from MIT
  - *Spring Flamingo the bipedal running machine*
  - *“Troody” Dinosaur like robot*
  - *“M2” Humanoid robot*

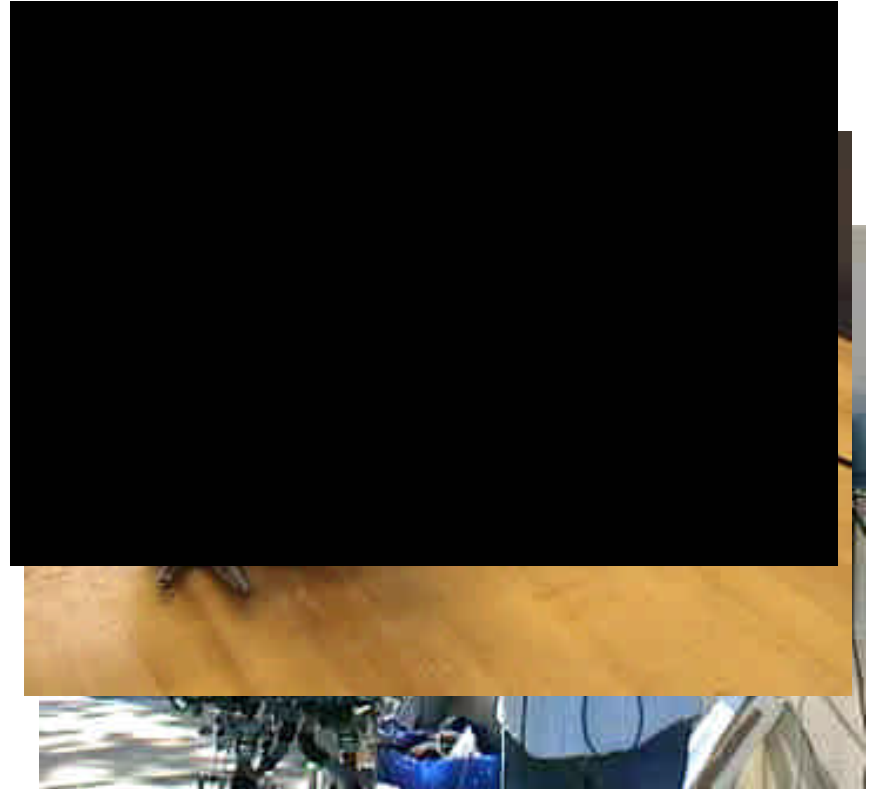


more infos : <http://www.ai.mit.edu/projects/leglab/>

## Humanoid Robots

---

- Wabian build at Waseda University in Japan
  - *Weight:* 107 kg
  - *Height:* 1.66 m
  - *DOF in total:* **43**

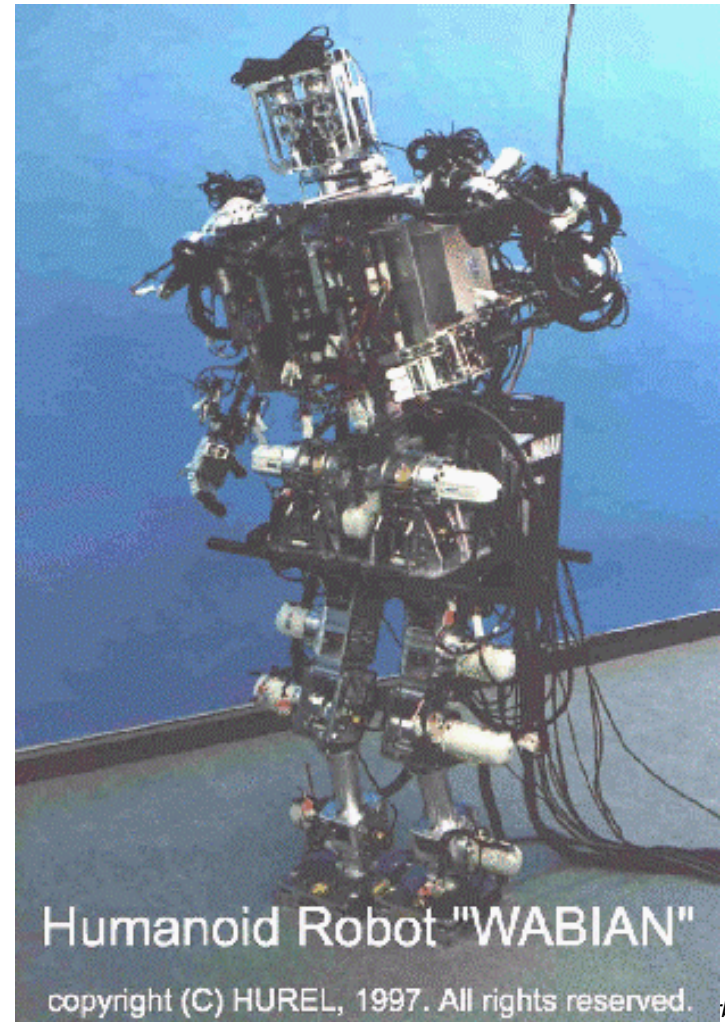


## Walking with Three Legs

---



## Walking Robots with Four Legs (Quadruped)


- Artificial Dog Aibo from Sony, Japan

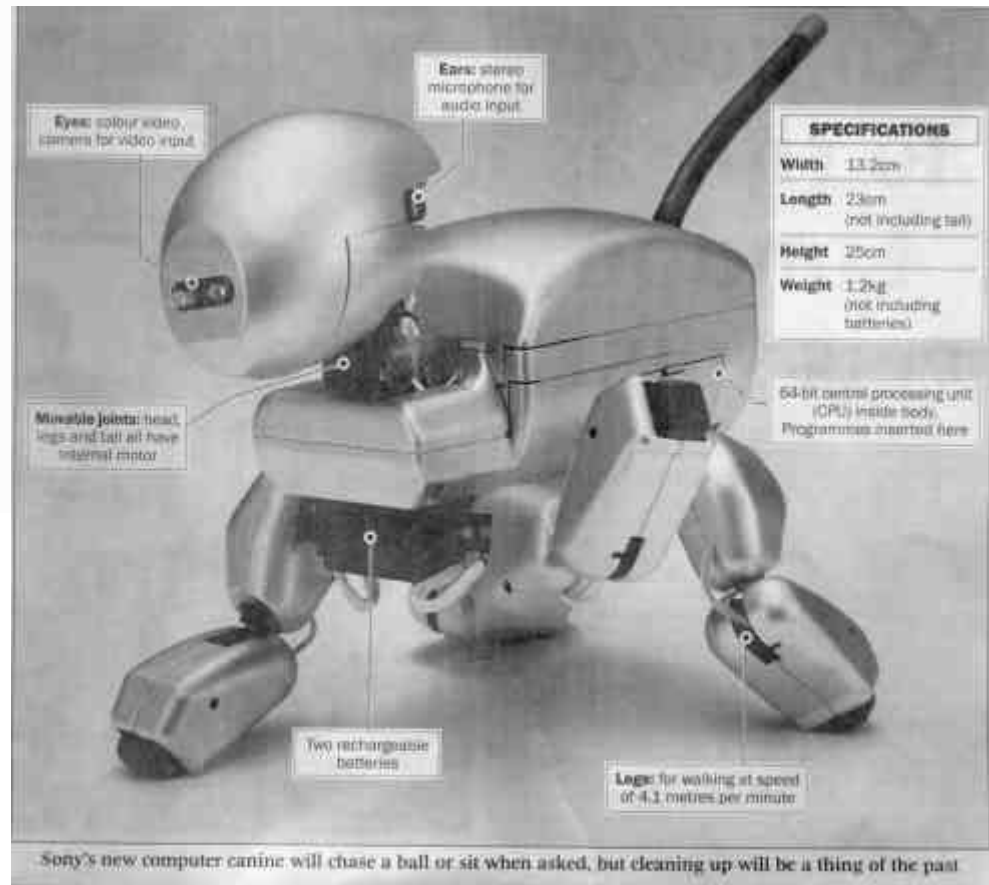

## Walking Robots with Four Legs (Quadruped)

- Titan VIII, a quadruped robot, Tokyo Institute of Technology

- *Weight: 19 kg*
- *Height: 0.25 m*
- *DOF: 4\*3*

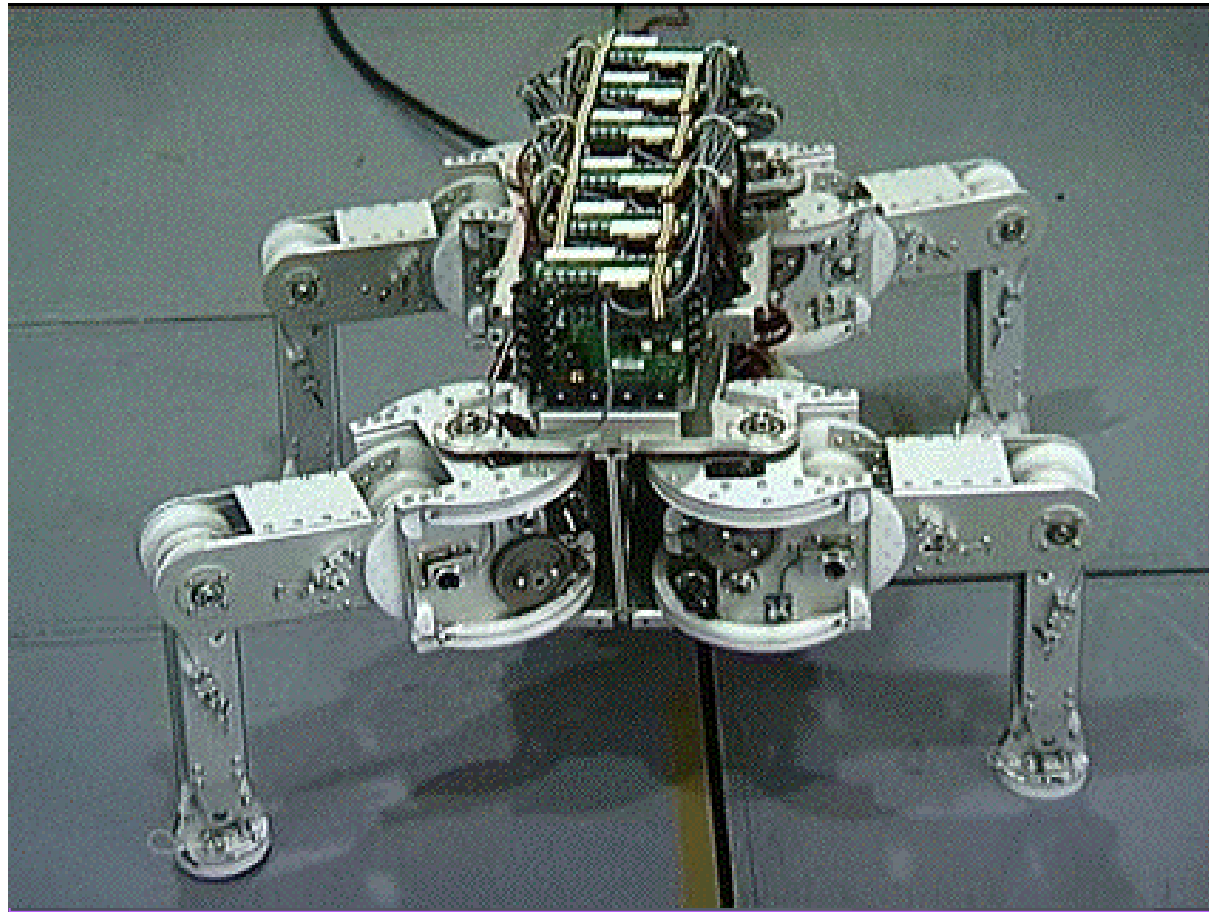


# Walking Robots with Four Legs (Quadruped)

---

Centre for Intelligent  
Machines

*Ambulatory Robotics Lab*

McGill University

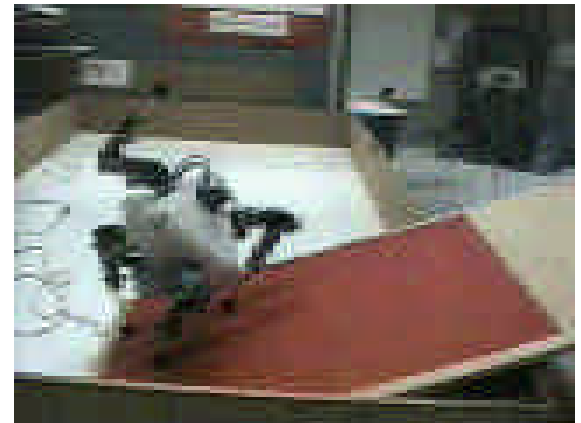

## Walking Robots with Six Legs (Hexapod)


---

- Most popular because static stable walking possible
- The human guided hexapod of Ohio State University
  - *Maximum Speed: 2.3 m/s*
  - *Weight: 3.2 t*
  - *Height: 3 m*
  - *Length: 5.2 m*
  - *No. of legs: 6*
  - *DOF in total: 6\*3*



## Walking Robots with Six Legs (Hexapod)

- Lauron II,  
University of Karlsruhe
  - *Maximum Speed: 0.5 m/s*
  - *Weight: 6 kg*
  - *Height: 0.3 m*
  - *Length: 0.7 m*
  - *No. of legs: 6*
  - *DOF in total:  $6 \times 3$*
  - *Power Consumption: 10 W*

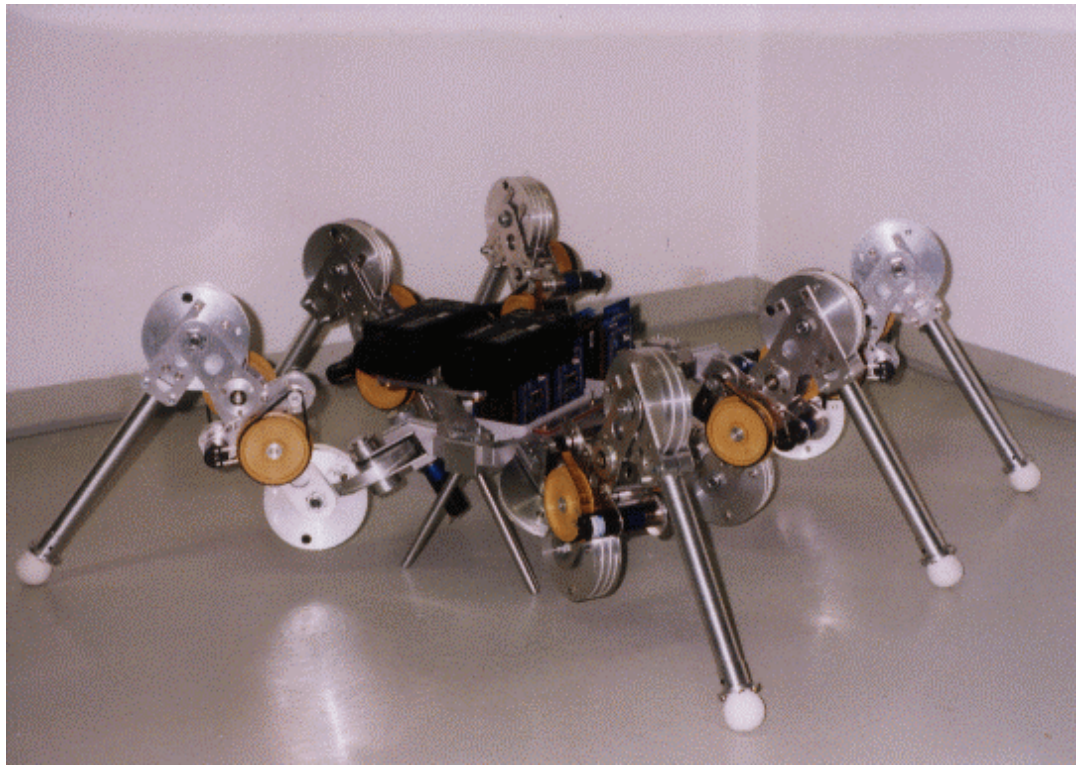


## Mobile Robots with Wheels

---

- Wheels are the most appropriate solution for most applications
- Three wheels are sufficient and to guarantee stability
- With more than three wheels a flexible suspension is required
- Selection of wheels depends on the application





## The Four Basic Wheels Types

- a) Standard wheel: Two degrees of freedom; rotation around the (motorized) wheel axle and the contact point
- b) Castor wheel: Three degrees of freedom; rotation around the wheel axle, the contact point and the castor axle

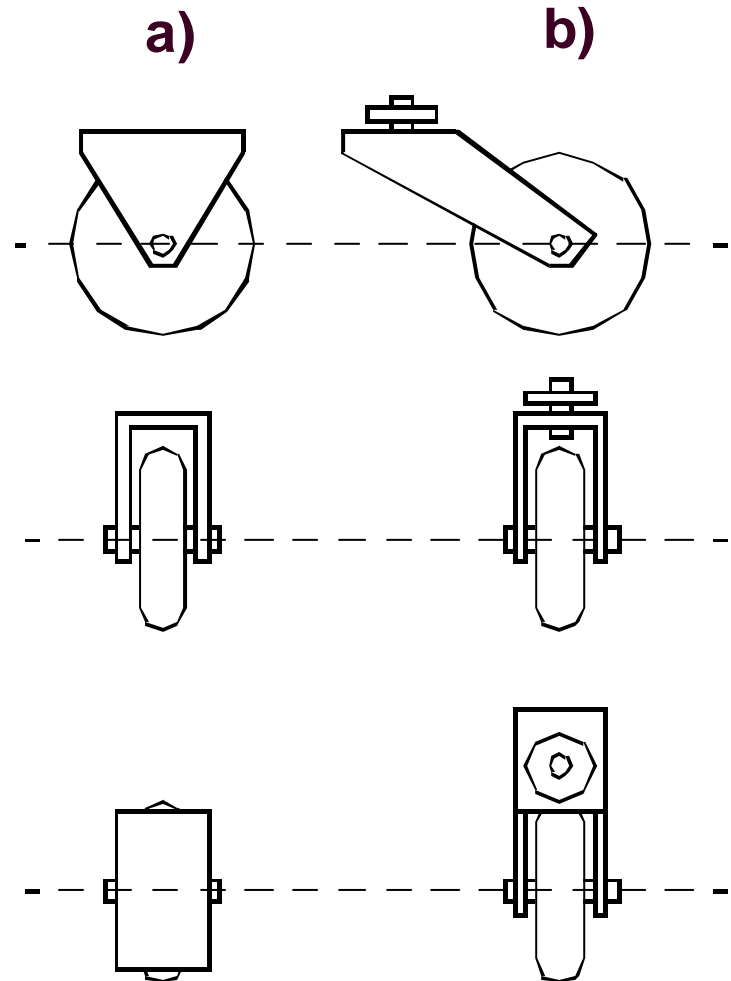

## The Four Basic Wheels Types

- c) Swedish wheel: Three degrees of freedom; rotation around the (motorized) wheel axle, around the rollers and around the contact point
- d) Ball or spherical wheel: Suspension technically not solved

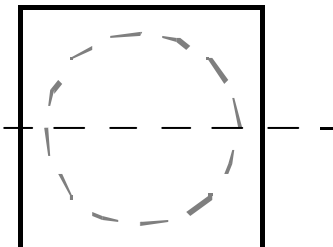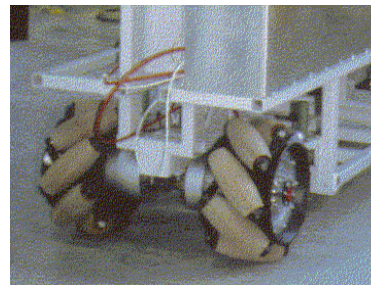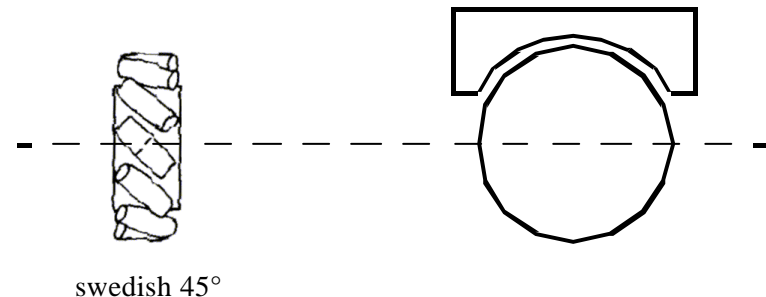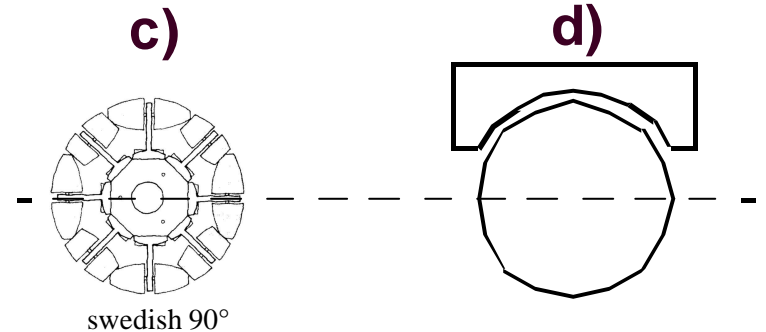


## Characteristics of Wheeled Robots and Vehicles

---





- Stability of a vehicle is be guaranteed with 3 wheels
  - *center of gravity is within the triangle with is formed by the ground contact point of the wheels.*
- Stability is improved by 4 and more wheel
  - *however, this arrangements are hyperstatic and require a flexible suspension system.*
- Bigger wheels allow to overcome higher obstacles
  - *but they require higher torque or reductions in the gear box.*
- Most arrangements are non-holonomic (see chapter 3)
  - *require high control effort*
- Combining actuation and steering on one wheel makes the design complex and adds additional errors for odometry.

# Different Arrangements of Wheels I


- Two wheels

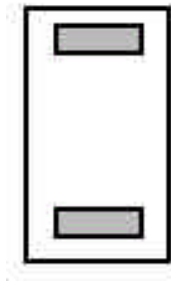

- Three wheels

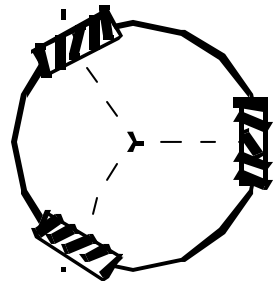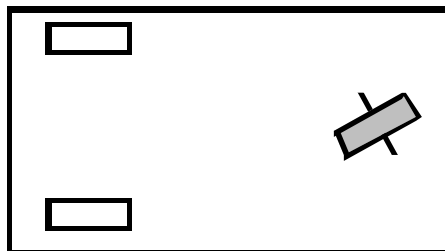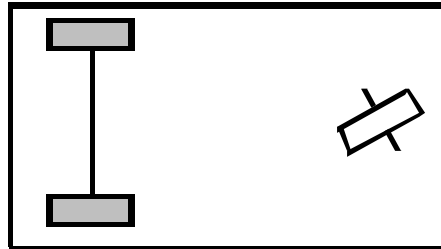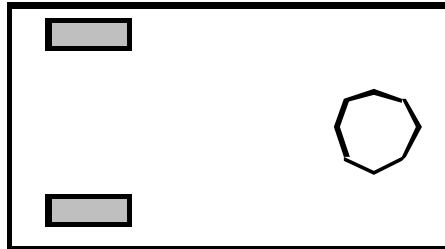






Omnidirectional Drive

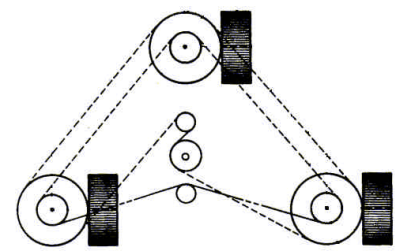



Synchro Drive

## Different Arrangements of Wheels II


- Four wheels

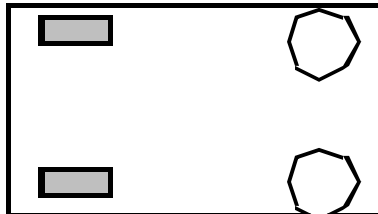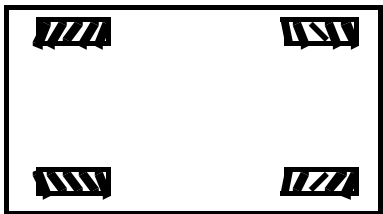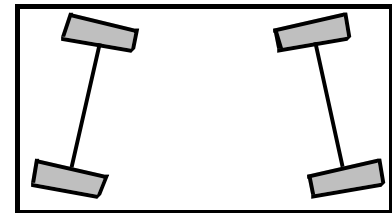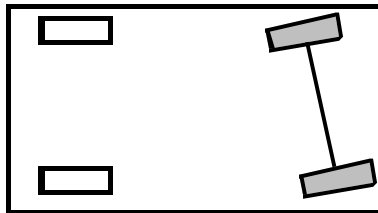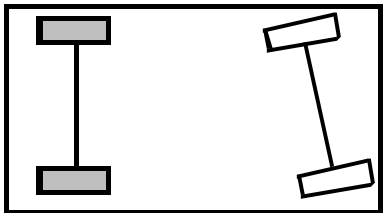

- Six wheels

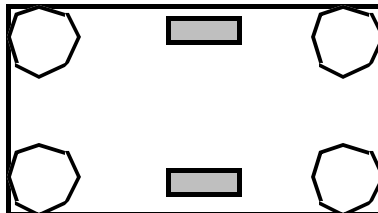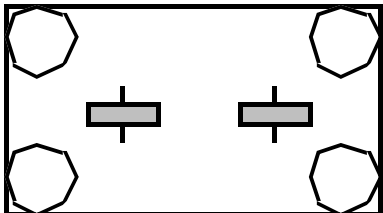


## Cye, a Two Wheel Differential Drive Robot

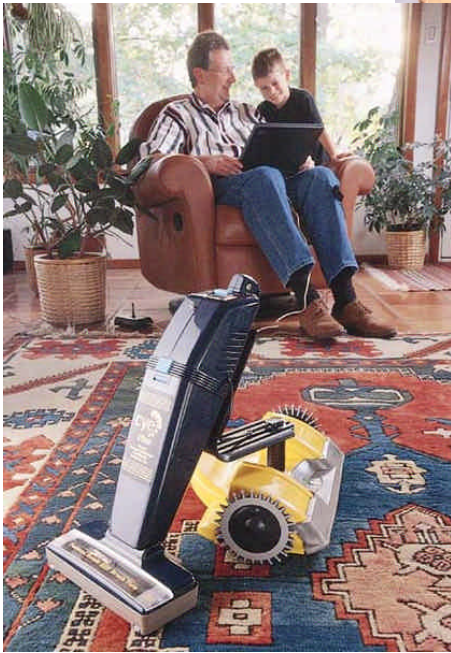



- Cye, a commercially available domestic robot that can vacuum and make deliveries in the home, is built by Probotics, Inc.

# Synchro Drive

- All wheels are actuated synchronously by one motor
  - *defines the speed of the vehicle*
- All wheels steered synchronously by a second motor
  - *sets the heading of the vehicle*
- The orientation in space of the robot frame will **always remain the same**
  - *It is therefore not possible to control the orientation of the robot frame.*


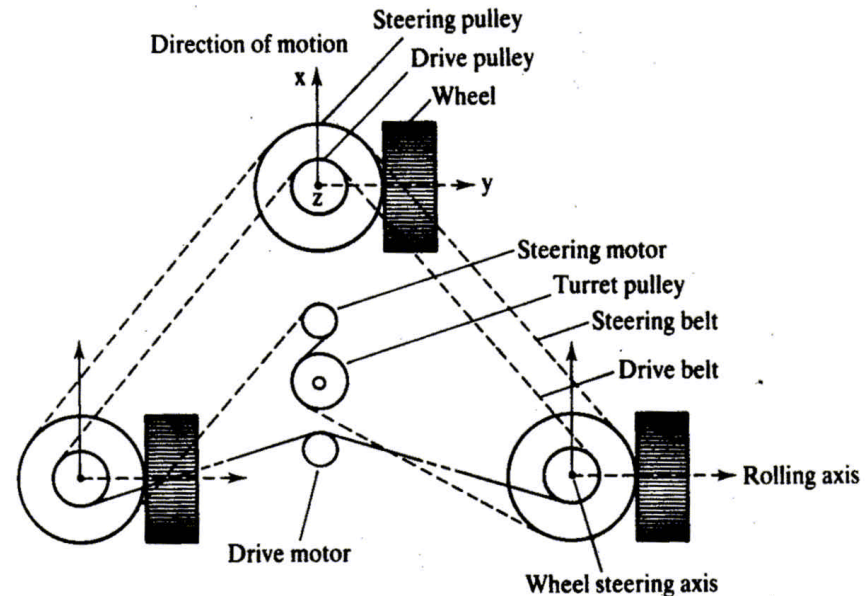


## Tribolo, Omnidirectional Drive with 3 Spheric Wheels

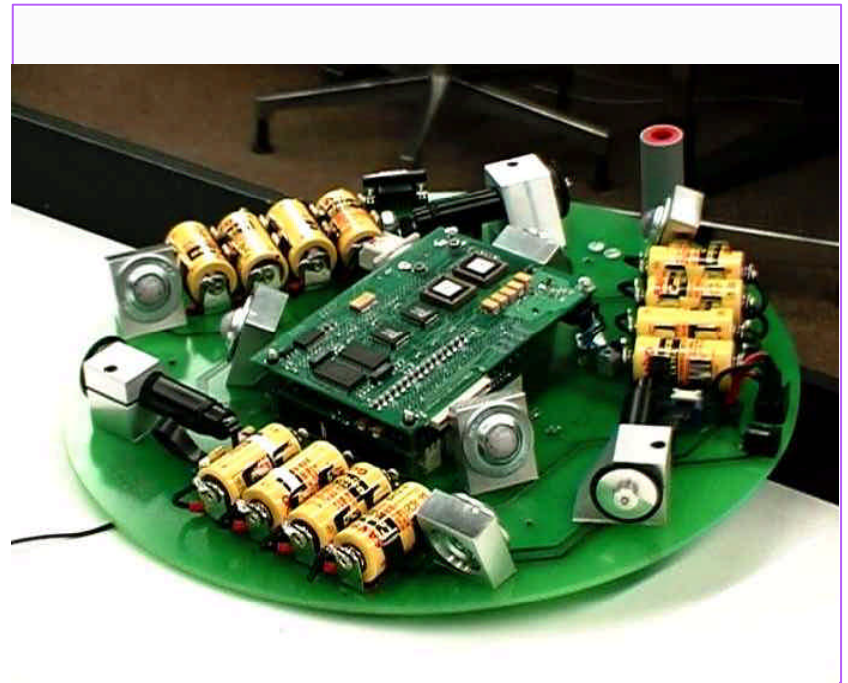
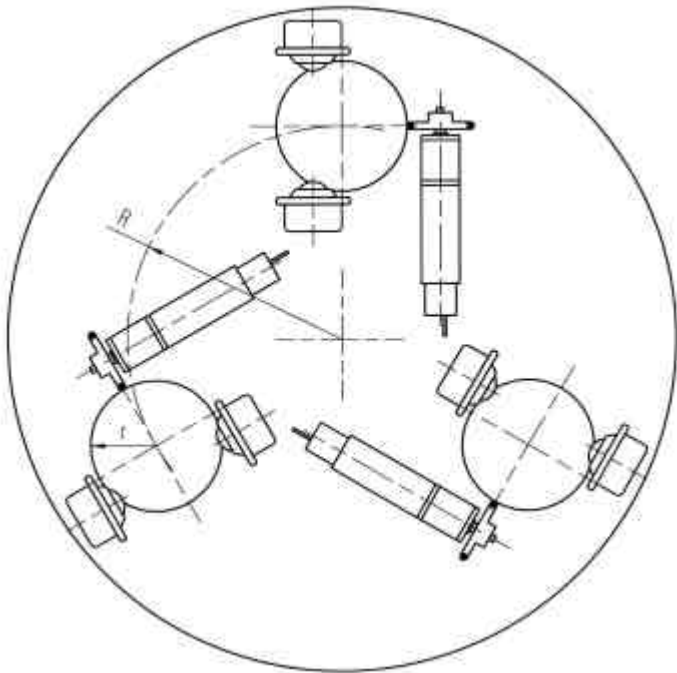


## Uranus, CMU: Omnidirectional Drive with 4 Wheels

- Movement in the plane has 3 DOF
  - *thus only three wheels can be independently controlled*
  - *It might be better to arrange three swedish wheels in a triangle*

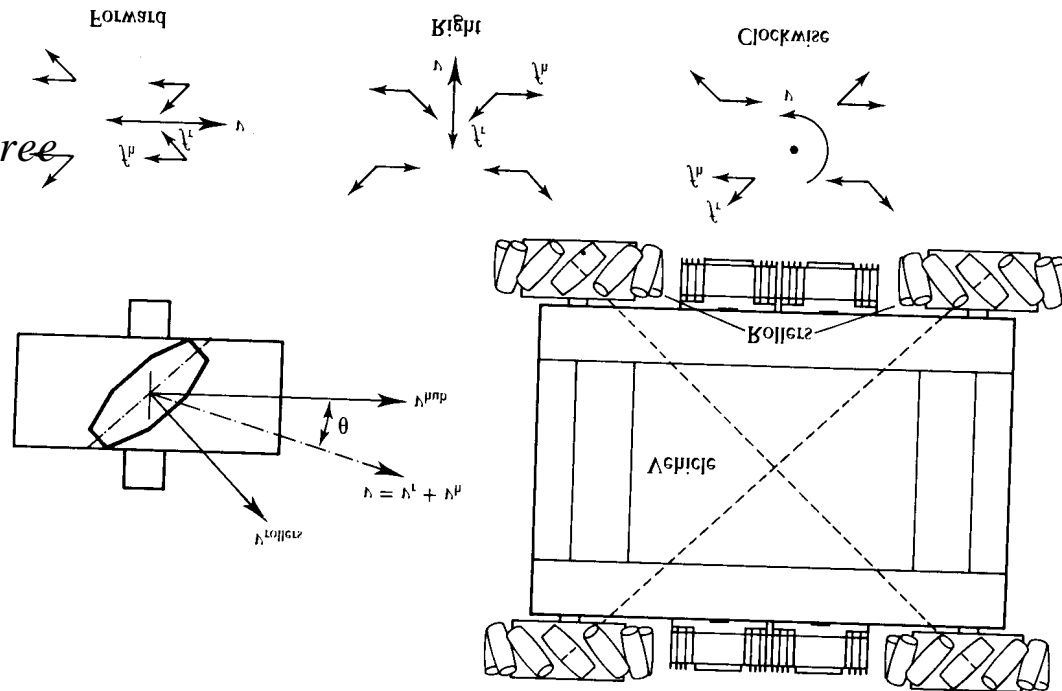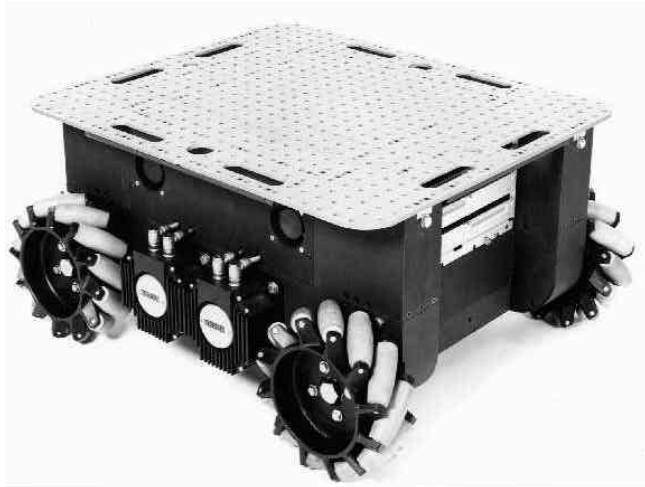

# Caterpillar

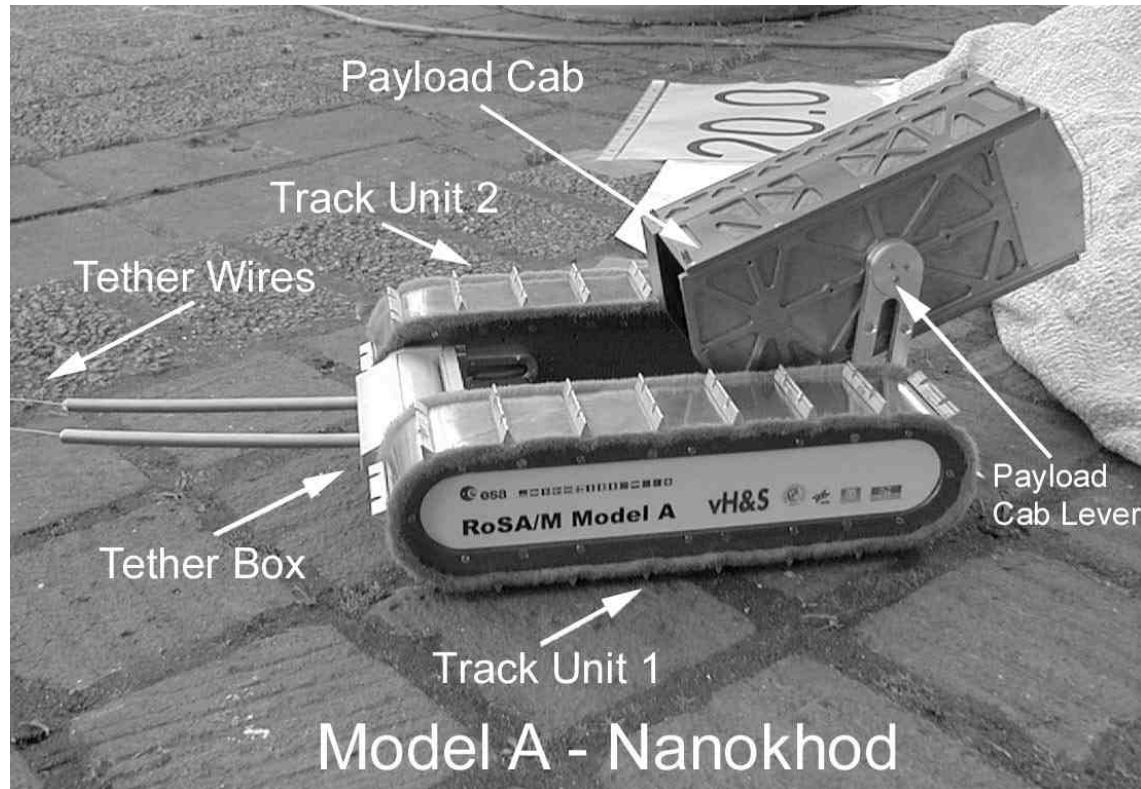

- The NANOKHOD II, developed by von Hoerner & Sulger GmbH and Max Planck Institute, Mainz for European Space Agency (ESA) will probably go to Mars

## Stepping / Walking with Wheels

---

- SpaceCat, and micro-rover for Mars, developed by Mecanex Sa and EPFL for the European Space Agency (ESA)




## SHRIMP, a Mobile Robot with Excellent Climbing Abilities

- Objective
  - *Passive locomotion concept for rough terrain*
- Results: The Shrimp
  - *6 wheels*
    - *one fixed wheel in the rear*
    - *two boogies on each side*
    - *one front wheel with spring suspension*
  - *robot sizing around 60 cm in length and 20 cm in height*
  - *highly stable in rough terrain*
  - *overcomes obstacles up to 2 times its wheel diameter*



# The SHRIMP Adapts Optimally to Rough Terrain

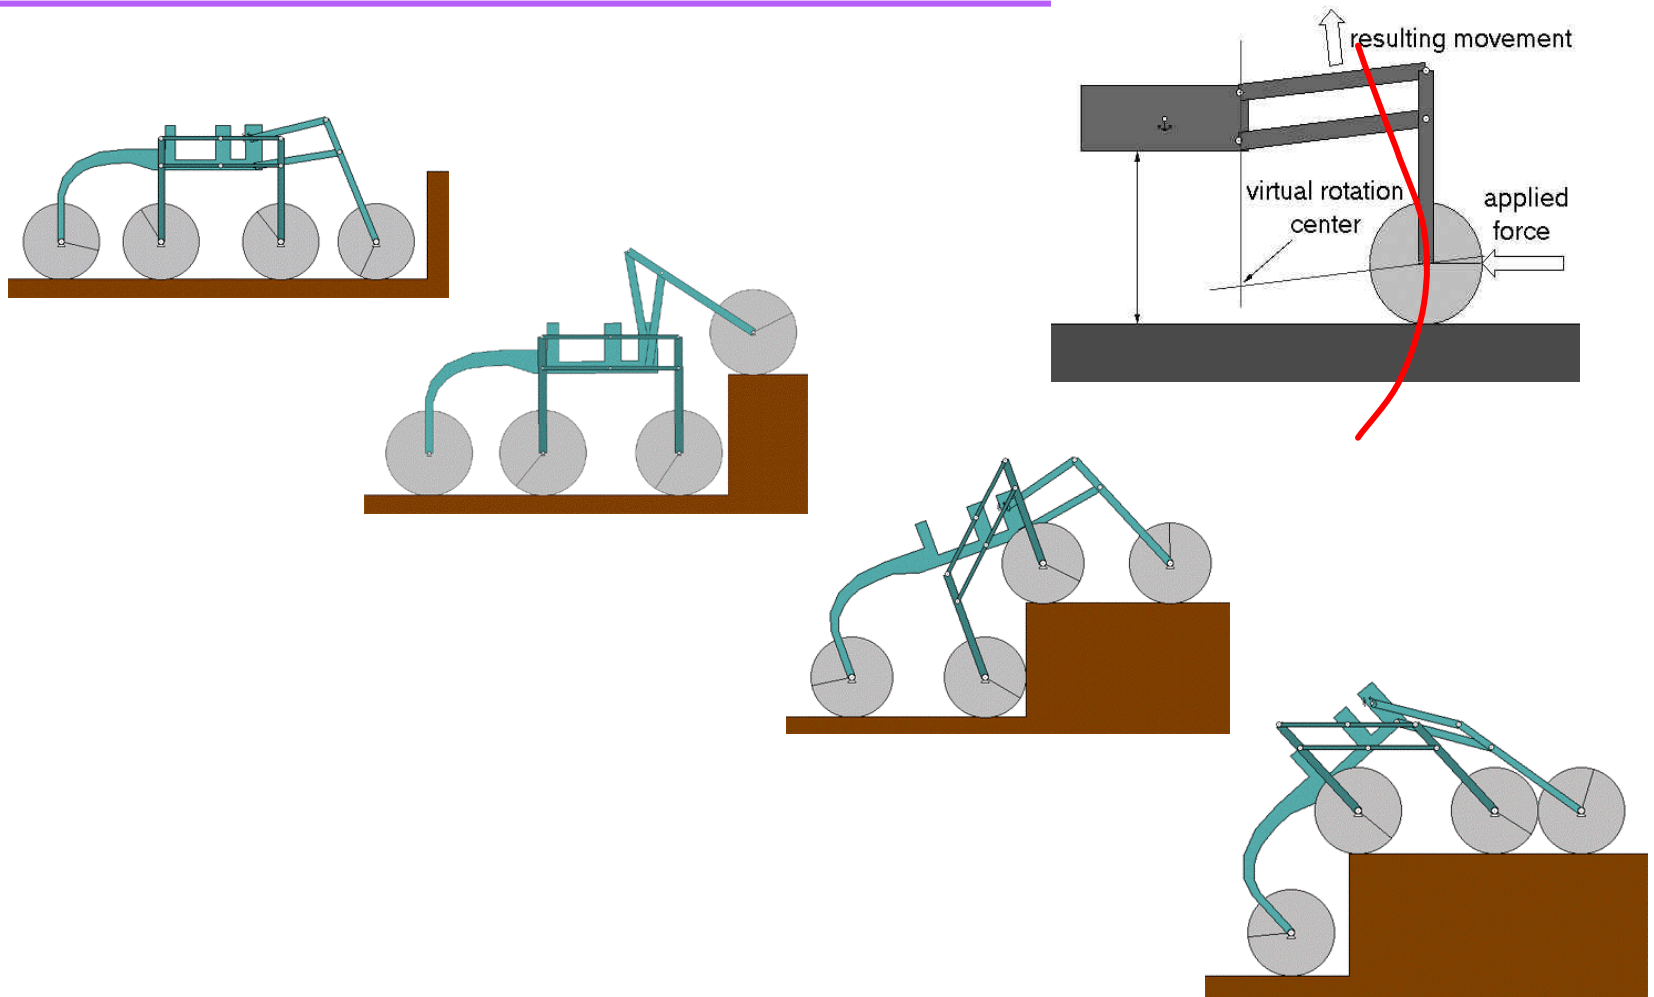

# The Personal Rover

---

